


# AUTO-Choice Range

## AUTO-Full®

Made in ITALY, designed for intensive use.

AUTO-Full® is designed for internal and external applications, self-repairing and suitable for every kind of industrial application.

AUTO-Full® is useful to manage people and vehicles passages between different units in the factories, dividing two different environments. Each door is home tested through internal procedures.

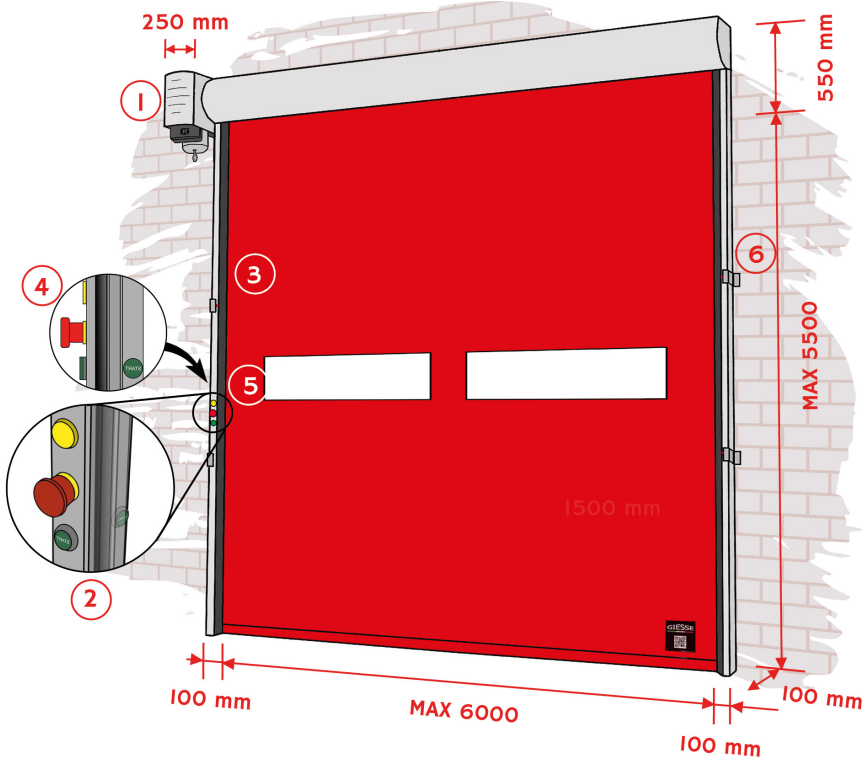

- 1. Integrated control panel 230 V
- 2. Start / stop push button on board
- 3. Light curtain
- 4. Start push button opposite side
- 5. Led flashing blinker
- 6. Brackets

CE

0497

GIESSE

LOGISTICA INDUSTRIALE

Loc. Pautasso, 3 - Castellinaldo (CN)

ITALIA

Tel. +39 (0) 173 658377

www.giesselogistica.com

12

type n. and DoP n.

XXXXXXXXXXXXXX

Type: AUTO FULL

Year: 2020

EN 13241:2003+A2:2016

UE N. 305/2011-2006/42/CE

Motorized door for

internal / external application

Power supply:

230 V

Power (Max): 1,5 Kw

Wind load resistance:

CLASS 2

ENERGY

Automatic Door

X10000097

Manufacturer: GIESSE S.R.L.

Model: SPIN&AUTO

Reference: 6.0x5.5 Mt. max.

Classification acc. Traffic Class

A

B

C

D

E

F

T2

T2

T4

Application: Industrial

Climate Class: Cfa

Size Class: S5

Door Type

High Speed

Flexible

U-Value

7,52

[W/m²K]

Air Permeability

12

[m³/m².s]

Mean Cycle Speed

0,73

[m/s]

Operating Power

1500

[W]

Stand-by Power

10

[W]

Classification is made under

E.U. CE specifications

This is a voluntary label provided

as a customer service to allow

consumers to make informed

decisions on the energy perfor-

mance of competing products.


# AUTO-Full®

Customizable curtain with a silk-screen painting or digital printing.  
Manageable from PLC.




SPECIFICATION	STANDARD FEATURES
Operator	Frontal or lateral (inverter)
Max clear passage	W 6000 x H 5500 mm
Upper beam size	350 x 350 mm
Rails	Self-supporting, electrical conduits included
Zipper	High density polietilen profile
Opening controls	Start / stop push button on board, led flashing blinker
Curtain	PVC 1200 gr/sqm
Curtain reinsert	Self-repairing
Windows	1 row 1000 x 300 mm each
Safety	Light curtains
Speed	1.2 m/s
Installation	Inside / outside
Wind resistance	Class 2

### Frame: Materials and colours

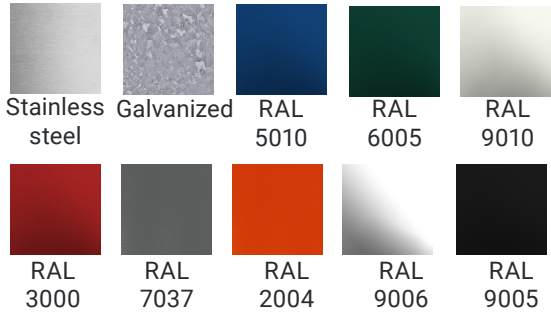

### PVC suggested colours

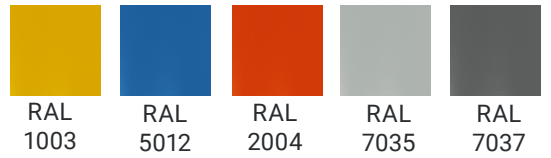

### PVC available colours

